




Grade Rings

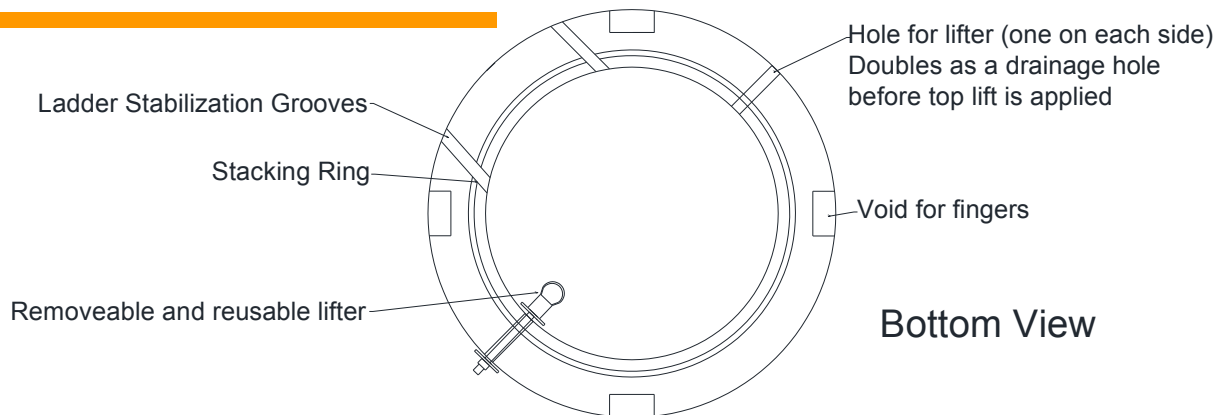

Safety First:

We feature finger voids on grade rings 75 mm and larger. No more pinched fingers.

Lifting Loop / Drain Holes:

The 75mm and taller units have holes which serve as drain holes. Useful in wet weather before the top lift is applied.

Insert the lifting loops into the drain holes and move the ring with hooks, chains and nuts and bolts, or plain old heavy duty carabineers. No special clamps or hooks required for lifting.

Less Breakage:

The lifting loops are centered allowing for easy balanced lifting. No more flipping rings over onto hard concrete. Flip them when you move them for installation.

Our yard becomes your second storage site:

We are located one minute off of Anthony Hendy drive. With pre-orders we can hold part or all of your order at our yard which can act as a pick up point for your crew.

Popular sizes:

We manufacture grade rings in three diameters, 635, 710 and 914mm, each available in four heights, 50, 75, 100 and 150mm.

Produced daily:

If we don't have what you need in stock when you call we can adjust our production and have what you need when you need them.

High strength:

32mpa concrete used with 10m rebar.

Gasket:

Gaskets are available should you want them.

11240—199 Street, Edmonton
(Take the 119 Ave exit going Southbound on Anthony Hendy)

Ph: (780) 930-4232 Fax: (780) 425-4232
Email: info@concreteinc.ca www.concreteinc.ca