




11240 199 St., Edmonton, AB T5S 2C6
 P:780-930-4232 F:780-425-4232
 www.concreteinc.ca
 email:info@concreteinc.ca

Stacking Ring

Hole for lifter (one on each side)
 Doubles as a drainage hole
 before top lift is applied

Removeable and reusable lifter

Void for fingers

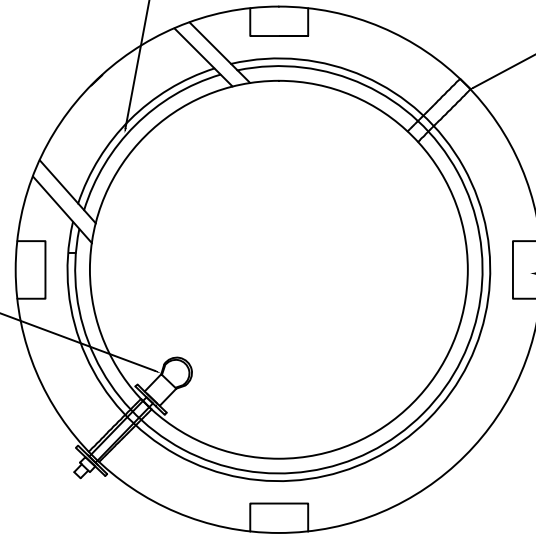

Bottom View

Hole For Lifter
 Doubles as a drainage hole
 before top lift is applied

Voids for Fingers

Side View



NOTES

CAPACITY	-
IMPERIAL DIMENSIONS	-
METRIC DIMENSIONS	-

DRAWING No.# GRADE RINGS

FILE No.# GRADE RINGS

Sales Order No.# -

CONCRETE	Volume (cu.m)	Mass (Kg)	Air Content
-	-	-	-
STRENGTH	Stripping (MPa)	28-days (MPa)	Rebar Grade
-	-	-	400W

FINISH : SMOOTH GREY

HANDLING INSTRUCTIONS
 Use lifting inserts as indicated
 in drawing. Lifting chain should
 be vertical to insert.

Capacity of crane, fork lift, etc.
 to be 1.5 times dead weight

No swinging or bending while
 lifting or transportation

REVISION NO.# -
 REVIEWED BY : -
 DATE : -

SCALE : NTS

SHEET NO.# 1/1

DRAWN BY: ED
 DATE: 2016-01-08